

1.4x and 2x Optimo extenders




	1.4x	2x
Mount	PL to PL mount	PL to PL mount
Weight	0.230kg - 0.5 lbs	0.280kg - 0.6 lbs
Length (PL to PL)	16mm - 0'63"	35mm - 1'38"

1.4x and 2X extenders are now compatible with the Optimo line (except Optimo DP - new Optimo 45-120 to be determined).

1.4x and 2x Optimo extenders on Optimo lenses

technical specifications

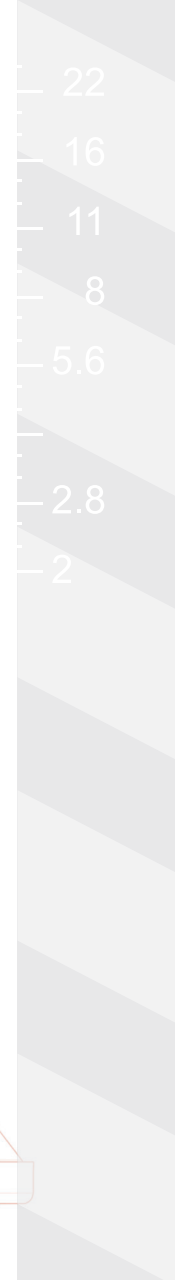

Optimo 24-290 with

System Focal length	35-420mm	48-580mm
Aperture	T4	T5.6
Image Coverage	S35+ / 31.4mm diagonal	S35+ / 31.4mm diagonal

Optimo 17-80 with

System Focal length	24-112mm	34-160mm
Aperture	T3.1	T4.4
Image Coverage	S35+ / 31.4mm diagonal	S35+ / 31.4mm diagonal

Optimo 28-76 with

System Focal length	40-110mm	56-152mm
Aperture	T3.6	T5
Image Coverage	S35+ / 31.4mm diagonal	S35+ / 31.4mm diagonal

Optimo 15-40 with

System Focal length	21-58mm	30-80mm
Aperture	T3.6	T5
Image Coverage	S35+ / 31.4mm diagonal	S35+ / 31.4mm diagonal

1.4X and 2X extenders are now compatible with the Optimo line (except Optimo DP - new Optimo 45-120 to be determined). These extenders are an ideal way of increasing focal length at a cost effective price. The focal length is multiplied by 1.4x or 2X with only one or two T-stop loss at full aperture.

Thales Angénieux in the USA

40G Commerce Way
Totowa NJ 07512 - USA
Phone: 1 973 812 3858
Fax: 1 973 812 9049
angenieux@tccus.com

Thales Angénieux Headquarters

Boulevard Ravel de Malval
42570 Saint-Héand - FRANCE
Phone: +33 (0)4 77 90 78 00
Fax: +33 (0)4 77 90 78 03
angenieux@fr.thalesgroup.com

Thales Angénieux in ASIA

10C Jalan Ampas #08-02
Ho Seng Lee Flatted Warehouse
Singapore 329513
Phone: +65 63 56 81 98
Fax: +65 62 50 60 85
angenieux@fr.thalesgroup.com

www.angenieux.com

All products and part thereof contained herein doesn't represent or obligate Thales Angénieux or any Thales company from producing, offering, selling, distributing or servicing said products. All characteristics and/or specifications of products contained herein are subject to change without notification. Some products may not be available depending on the country.